

BUCHANANS

UNDERGROUND TANK MANWAY COVERS

Buchanans manway covers are wholly cast from Primary Aluminium. They comply with Australian and New Zealand "Highway Normal" Axle Loading Standards. They have a clear inside access diameter of 1036 mm.

FEATURES B-1130

- 1** Designed in consultation with and professionally engineered for the Petroleum Industry
- 2** Support Ring, Lid and Tobies manufactured from Primary Aluminium to A.D.C. Standard CC601/T1 to provide the cover with high strength, light weight and maximum resistance to corrosion.
- 3** Tobies flush mounted and sealed to avoid traffic rattle, minimise pedestrian hazard and prevent ingress/egress of water vapour.
- 4** Aesthetically pleasing surface finish with grip tread pattern for traffic and pedestrian safety
- 5** Support Ring of design to facilitate cost effective installation in forecourt concrete.
- 6** Provision of installation Jack Lugs to allow the Support Ring to be correctly located and supported until the concrete has been poured and cured.
- 7** Enhanced lid seal effectiveness through use of six Lid retaining screws allowing optimum compression of special "D" seal and the incorporation of drainways to free water from the seal surround.
- 8** Tamper Free Security through use of recessed Lid retaining screws and offset keyhole for lid and toby removal.


CT



Support
Ribbing



LPG

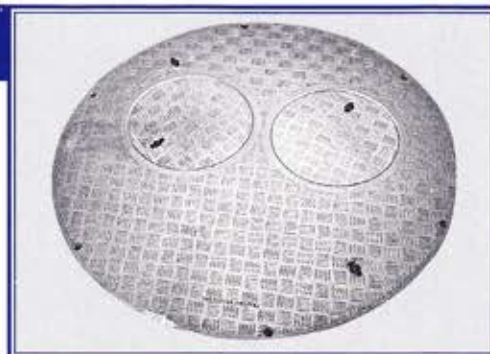

Assembled
with Drain
Tubes



Support
Ring



NZF PRODUCTS LTD